

## GH1271

MICROPOWER, HIGH SENSITIVITY,  
UNIPOLAR HALL-EFFECT SWITCH**◆ General Description**

The GH1271 is an ultra-sensitive Hall-effect unipolar switch IC with digital latched output, mainly designed for battery-operation, hand-held equipment.

Special CMOS process is used for low-voltage and low-power requirement. A chopper stabilized amplifier improves stability of magnetic switch points. The circuit design provides an internally controlled clocking mechanism to cycle power to the Hall sensor and analog signal processing circuits. This serves to place the high current-consuming portions of the circuit into a “Sleep” mode. Periodically the device is “Awakened” by this internal logic and the magnetic flux from the Hall sensor is evaluated against the predefined thresholds. If the flux density is above or below the  $B_{OP}/B_{RP}$  thresholds then the output transistor is driven to change states accordingly. While in the “Sleep” cycle the output transistor is latched in its previous state. The design has been optimized for service in applications requiring extended operating lifetime in battery powered systems.

The IC switching behaviour is unipolar, it means the south pole sufficient strength will turn the output

on. If the magnetic flux density is larger than operating point ( $B_{OP}$ ), the output will be turned on; if it is less than releasing point ( $B_{RP}$ ), the output will be turned off.

The GH1271 is available in SIP-3L (or TO-92S), SOT23-3L and DFN1010-3 packages which are optimized for most applications.

**◆ Features**

- On Chip Hall Effect Sensor
- Micropower Operation
- 1.5 to 5.5V Power Supply
- Switching for South Pole Magnet
- Chopper Stabilized amplifier stage
- Superior Temperature Satability
- Digital Output Signal
- Built-in Pull-up Resistor (GH1248/GH1250)
- Push-Pull CMOS Output Stage

**◆ Applications**

- Solid State Switch
- Handheld Wireless Headset Awake Switch
- Lid Close Sensor for Battery-Powered Devices

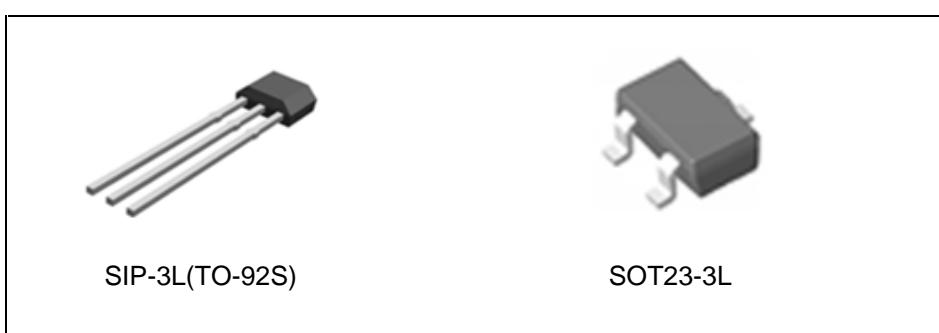


Figure 1. Package Type of GH1271


GH1271

MICROPOWER, HIGH SENSITIVITY,  
UNIPOLAR HALL-EFFECT SWITCH


## ◆ Ordering Information

Package	Temperature Range	Part Number	Marking ID	Packing Type
SIP-3L(TO-92S)	-40 to 85 °C	GH1271EUA	G271	Bulk
SOT23-3L	-40 to 85 °C	GH1271ESW	G271	Tape and Reel
DFN1010-3	-40 to 85 °C	GH1271XXX	G271	Tape and Reel

## ◆ Pin Configuration (Not to Scale)

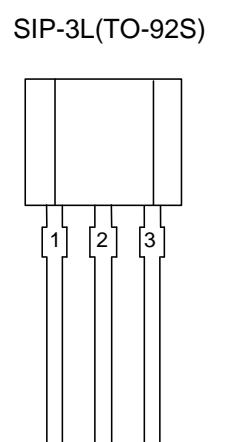

(Front View)

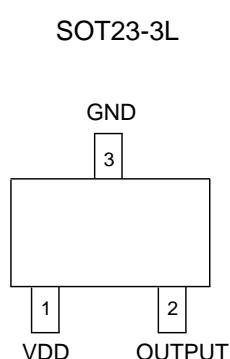

(Top View)

Figure 2. Pin Configuration of GH1271

GH1271

MICROPOWER, HIGH SENSITIVITY,  
UNIPOLAR HALL-EFFECT SWITCH

## ◆ Pin Description

Pin Number			Pin Name	Function
SIP-3L	SOT23-3L	DFN1010-4		
1	1	2	VDD	Power Supply
2	3	4	GND	Ground pin
3	2	1	OUTPUT	Output pin
-	-	3	N/C	N/C

## ◆ Functional Block Diagram

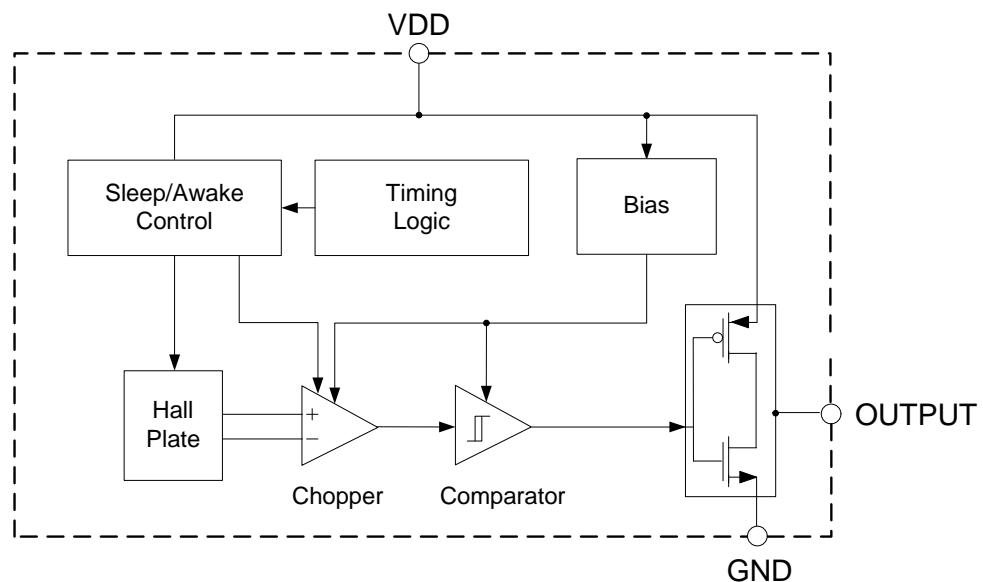


Figure 3. Functional Block Diagram of GH1271

GH1271

MICROPOWER, HIGH SENSITIVITY,  
UNIPOLAR HALL-EFFECT SWITCH**◆ Absolute Maximum Ratings ( $T_A=25^\circ\text{C}$ , Note 1)**

Parameter	Symbol	Value		Unit
Supply Voltage	$V_{DD}$	-0.3~6.0		V
Supply Current (Fault)	$I_{DD}$	2.5		mA
Output Voltage	$V_{OUT}$	-0.3~6.0		V
Output Current	$I_{OUT}$	5.0		mA
Magnetic Flux Density	B	Unlimited		Gauss
Power Dissipation	$P_D$	SIP-3L	400	mW
		SOT23-3L	230	
Storage Temperature	$T_{STG}$	-55 to 150		°C
Junction Temperature	$T_J$	150		°C

Note 1: Stresses greater than those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under "Recommended Operating Conditions" is not implied. Exposure to "Absolute Maximum Ratings" for extended periods may affect device reliability.

Note 2: Electronic semiconductor products are sensitive to Electro Static Discharge (ESD). Always observe Electro Static Discharge control procedures whenever handling semiconductor products.

**◆ Recommended Operating Conditions**

Parameter	Symbol	Min	Max	Unit
Supply Voltage	$V_{DD}$	1.5	5.5	V
Operating Temperature	$T_{OP}$	-40	85	°C

GH1271

MICROPOWER, HIGH SENSITIVITY,  
UNIPOLAR HALL-EFFECT SWITCH

## ◆ Electrical Characteristics

$V_{DD}=3.0V$ ,  $T_A =25^\circ C$ , unless otherwise specified.

Parameter	Symbol	Conditions	Min	Typ	Max	Unit
Supply Voltage	$V_{DD}$	Operating	1.5	2.0	5.5	V
Supply Current	$I_{SOP}$	AWake(Operating)	-	1.0	2.0	mA
	$I_{SL}$	Sleep(Standby)	-	1.0	2.0	$\mu A$
	$I_{SAVG}$	Average	-	2.5	10.0	$\mu A$
Output Current	$I_{OUT}$		1.0	-	5.0	mA
Output Leakage Current	$I_{LEAK}$	$B < B_{RP}$	-	<0.01	1.0	$\mu A$
Saturation Voltage	$V_{SAT}$	$I_{OUT} = 1.0mA$	-	0.05	0.25	V
Awake Time	$t_{AW}$	AWake(Operating)	100	300	500	$\mu s$
Sleep Time	$t_{SL}$	Sleep(Standby)	50	100	150	ms

## ◆ Magnetic Characteristics

$V_{DD}=3.0V$ ,  $T_A =25^\circ C$ , unless otherwise specified.

Parameter	Symbol	Conditions	Min	Typ	Max	Unit
Operating point	$B_{OP}$	$B > B_{OP}, V_{OUT} = \text{low}(\text{output on})$		40	50	Gauss
Releasing Point	$B_{RP}$	$B < B_{RP}, V_{OUT} = \text{high}(\text{output off})$	20	30		Gauss
Hysteresis	$B_{HYS}$		5	10	15	Gauss

GH1271

MICROPOWER, HIGH SENSITIVITY,  
UNIPOLAR HALL-EFFECT SWITCH

### ◆ Magnetic Characteristics (Continued)

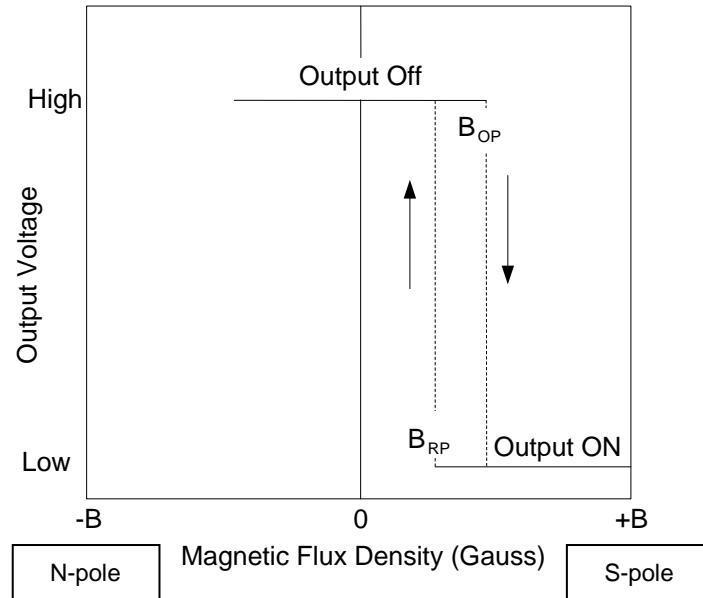


Figure 4. Output Voltage vs. Magnetic Flux Density

### ◆ Typical Application Circuit

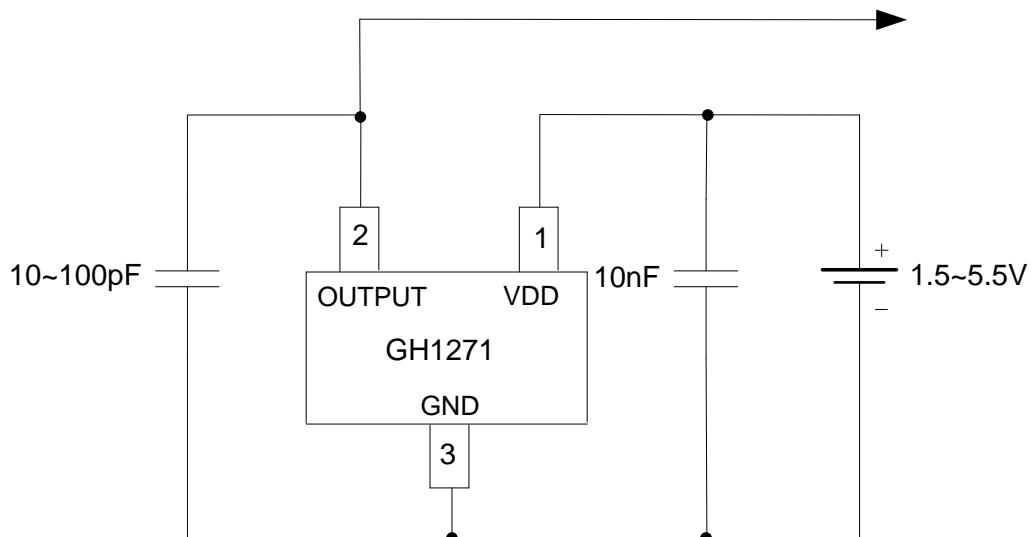



Figure 5. Typical Application of GH1271

GH1271

MICROPOWER, HIGH SENSITIVITY,  
UNIPOLAR HALL-EFFECT SWITCH

## ◆ Mechanical Dimensions

SIP-3L(TO-92S) Unit: mm(inch)

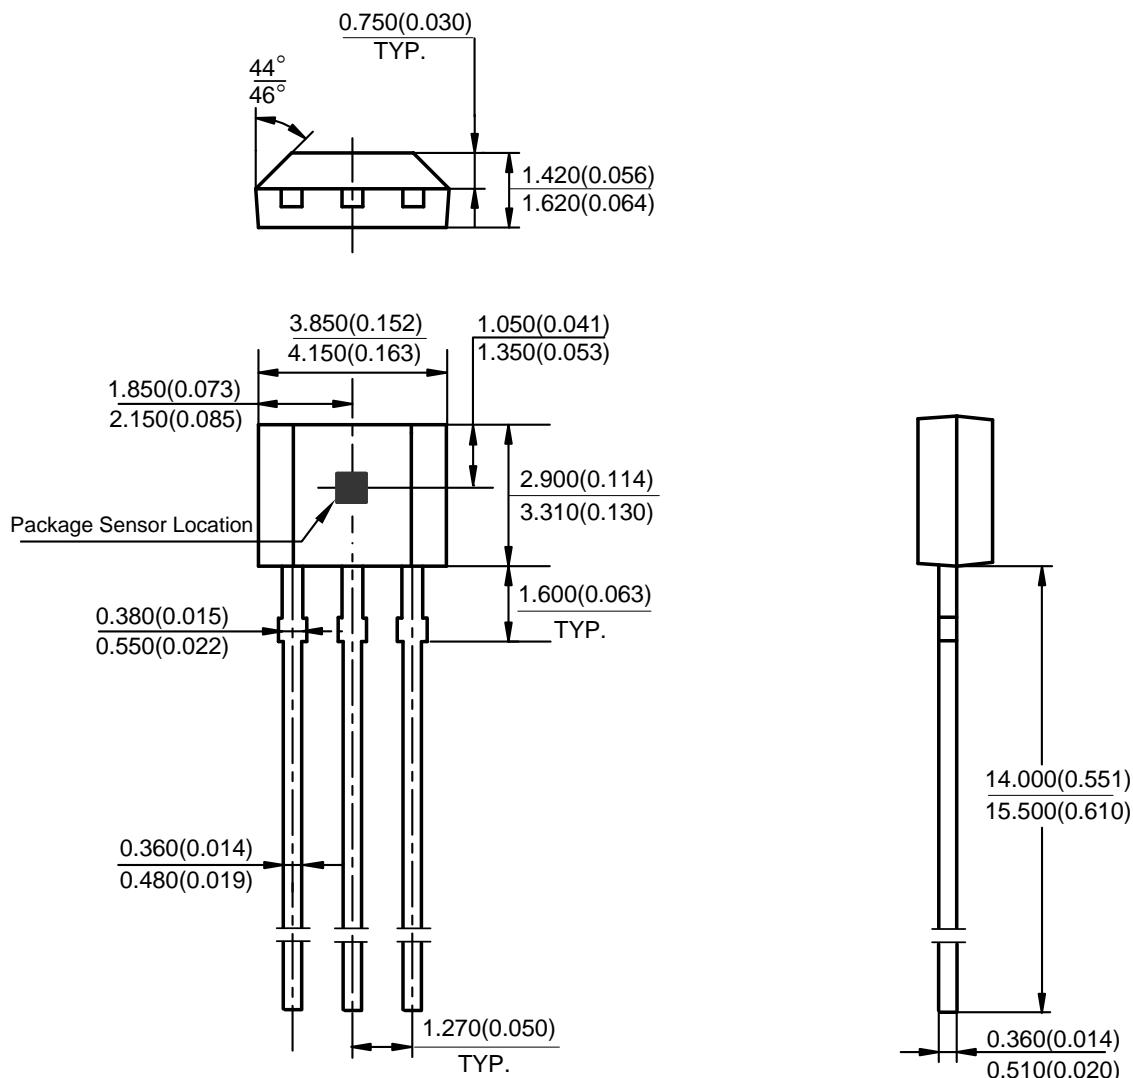

GH1271

MICROPOWER, HIGH SENSITIVITY,  
UNIPOLAR HALL-EFFECT SWITCH

## ◆ Mechanical Dimensions (Continued)

SOT23-3L Unit: mm(inch)

